

# Amicus pager

Model: BE2350



## Features

The Amicus pager is robust, lightweight and easy to use. It operates for 24 hours on a single charge and has a customizable inlay. In addition, the desktop charger features battery backup and an outlet for a bed shaker.



### Clear notifications

Alerts the caregiver with a combination of powerful vibrations, colored LEDs and an optional sound signal.



### Auto configuration

Handles up to four Amicus transceivers and automatically adapts the signal patterns to the system configuration.



### Nighttime alerts

Comes with a desktop charger that is equipped with an outlet for a bed shaker to enable nighttime alerts.



### Smart tracking

Immediately warns for system faults or if the pager moves out of range, providing piece of mind for the caregiver.



### Long lasting power

Operates for a straight 24 h even during the busiest work shift and alerts for incoming alarms during charging.



### Easy to use

Features clean and functional Scandinavian design with great ergonomics and a user friendly interface.

# Technical specifications



## Pager dimensions and weight

Height: **91 mm**  
 Width: **55 mm**  
 Depth: **23 mm**  
 Weight: **60 g incl. battery**




## Charger dimensions and weight

Height: **110 mm**  
 Width: **93 mm**  
 Depth: **110 mm**  
 Weight: **195 g incl. battery backup**



## Pager and charger overview

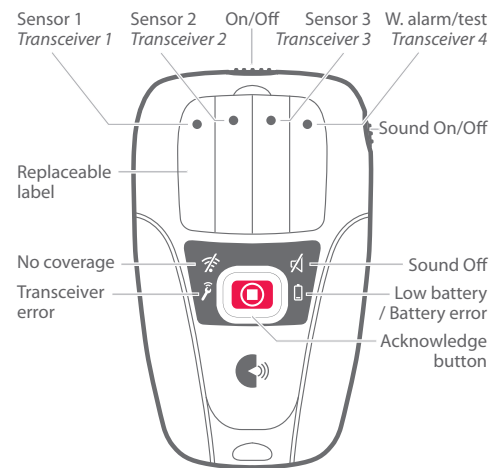


## Pager power and battery

- **Battery power**  
1 x 1.2 V AAA rechargeable NiMH battery. Use the supplied rechargeable battery model HFR-AAA900 900 mAh by Shenzhen Highpower Technology Co. Ltd.
- **Operating time**  
24 hours
- **Power consumption**  
20 mA
- **Charging time**  
Up to 6 hours

## Charger power and battery

- **Mains power**  
Input: 100-240V~50/60Hz 0.5A,  
Output: 7.5V = 1600mA.  
Use the supplied adaptor model SFP0751600P made by Helms-Man.
- **Battery power**  
4 x 1.2 V AAA rechargeable NiMH batteries.  
Use the supplied rechargeable batteries model 80AAAHC 800 mAh by GP.
- **Power consumption**  
200 mA

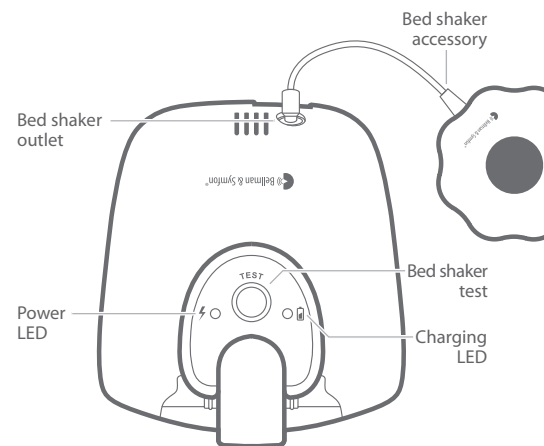

## Frequency and coverage

- Radio frequency: 869.2375 MHz
- Coverage: Up to 600 m line of sight. The range is reduced by walls and large objects and can be affected by other radio transmitters.

## Charger connections

- 7.5 V power cord
- 3.5 mm tele jack for bed shaker  
Features a bed shaker test button located on the top

## Environment and regulations

- For indoor use only
- Temperature: 59° to 95° F (15°-35° C)
- Relative humidity: 5% -95%, non condensing
- Complies with CE, WEEE, R&TTE and RoHS

## In the box

- BE2350 Amicus pager
- BE1251 Pager charger
- Mains adaptor
- User manual



## Accessories

The following accessory is available:

- BE1270 Bed shaker for nighttime alerts

© and TM 2015, Bellman & Symfon AB

Amicus, Bellman and Bellman & Symfon are registered trademarks owned by Bellman & Symfon AB, all rights reserved. All product designs are patented. This leaflet is subject to change without prior notice.

BE2350\_003DSH001

[bellman.com](http://bellman.com)